


# API 610 PROCESS PUMP

PUMP MODEL **SPR/SPRB** ..... Catalog No. CS1833E\*

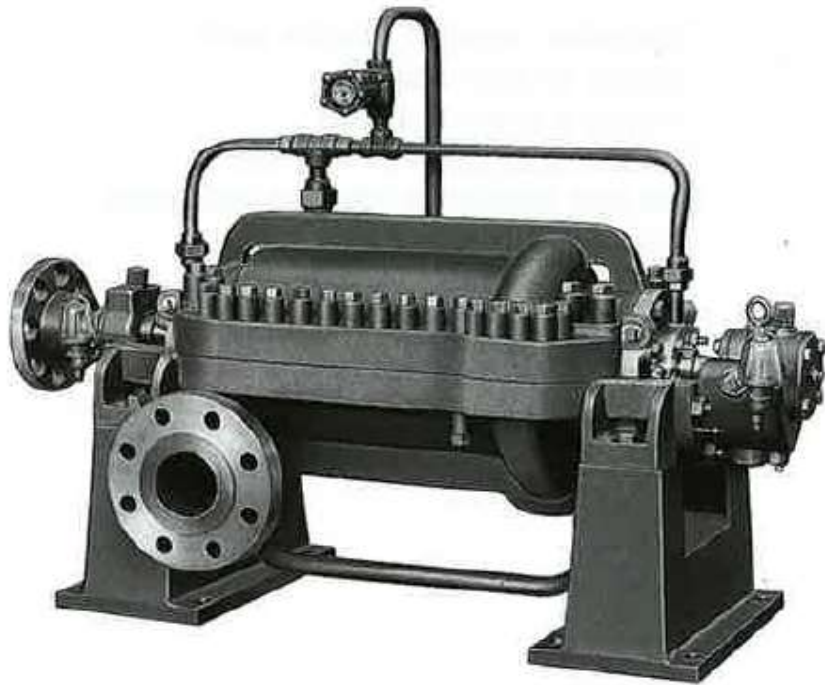

## Design

Near Centerline support, Axial split  
Multistage, Diffuser type casing  
Tandem impeller arrangement for SPR  
Opposed impeller arrangement for SPRB  
Full compliance with API 610

## Application

Pipeline, Crude Oil Transfer  
Petroleum refinery,  
Petrochemical Industry  
Other Industries

Rating	
Capacity	upto 180 m <sup>3</sup> /h (790 U.S.gpm)
Head	upto 1500 m (4920 ft)
Temperature	upto 205°C (400°F)
Flange Rating	upto ANSI Class 900 lb Others are also available