
API 610 PROCESS PUMP

PUMP MODEL SP/SPD

······Catalog No. CS1830E*

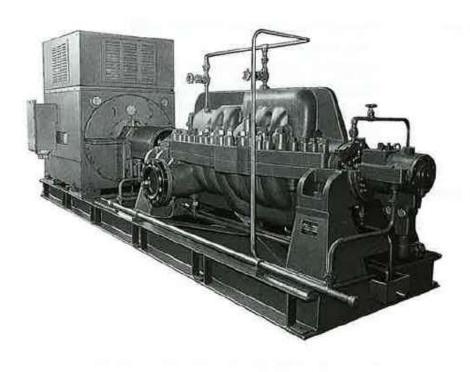

Design

Near Centerline support, Axial split Multistage, Double Volute casing Opposed impeller arrangement

Double Suction 1st stage Impeller for SPD

Low NPSH performance for SPD Full compliance with API 610

Application

Pipeline, Crude Oil Transfer

Petroleum refinery, Petrochemical Industry

Other Industries

Rating	
Capacity	upto 4200 m³/h (18550 U.S.gpm)
Head	upto 1500 m (4920 ft)
Temperature	upto 205°C (400°F)
Flange Rating	upto ANSI Class 2500 lb Others are also available